




CUT GROOVE SPECIFICATIONS FOR LARGE DIAMETER IPS PIPE

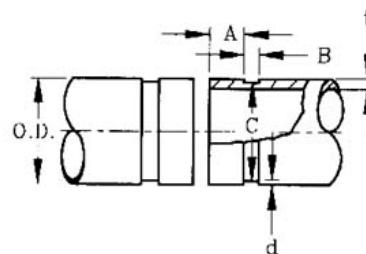

| 1 Nominal Size | 2 Basic Pipe Outside Diameter Tolerances | 3 Gasket Seat A +0.03, -0.06 +0.8, -1.5 | 4 Groove Width B ±0.03 ±0.76 | 5 Groove Dia. C +0.00 +0.000 | 6 Groove Depth d (ref) | 7 Min. Allow Wall thickness t |
|----------------------|---|---|--|--|---------------------------------|---|
| in mm | in mm | in mm | in mm | in mm | in mm | in mm |
| 26 650 | 26.0 660.4 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 25.5 -0.063 647.7 -1.60 |
| 28 700 | 28.0 711.2 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 27.50 -0.063 698.5 -1.60 |
| 30 750 | 30.0 762.0 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 29.5 -0.063 749.3 -1.60 |
| 32 800 | 32.0 812.8 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 31.50 -0.063 800.10 -1.60 |
| 34 850 | 34.0 863.6 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 33.50 -0.063 850.9 -1.60 |
| 36 900 | 36.0 914.4 | -0.093 +2.36 | -0.031 -0.79 | 1.75 44.5 | 0.625 15.9 | 35.50 -0.063 901.70 -1.60 |
| 40 1000 | 40.0 1016.0 | -0.093 +2.36 | -0.031 -0.79 | 2.00 50.8 | 0.625 15.9 | 39.50 -0.063 1003.30 -1.60 |
| 42 1050 | 42.0 1066.8 | -0.093 +2.36 | -0.031 -0.79 | 2.00 50.8 | 0.625 15.9 | 41.50 -0.063 1054.10 -1.60 |

Nominal Pipe Size (Column 1):

Nominal pipe size, IPS pipe to ANSI B36.10 and ISO 4200.

Pipe O.D. (Column 2):

Maximum allowable tolerances from square of ends is 0.060".

Gasket Seating Surface (Column 3):

The gasket seating surface shall be free from deep scores, marks, or ridges that could prevent a positive seal.

Groove Width (Column 4):

Groove width is to be measured between vertical flanks of the groove side walls.

Groove Diameter (Column 5):

The "C" diameters are average values. The groove must be of uniform depth around the entire pipe circumference.

Groove Depth (Column 6):

The "d" is for reference use only. The groove dimension shall be determined by the groove diameter "C".

Minimum Wall Thickness (Column 7):

The "t" is the minimum allowable wall thickness that may be roll-grooved.

Note:

- *Shurjoint* reserves the right to change specifications, designs and or standard equipment without notice and without incurring any obligations.