


MODEL SS-28 STAINLESS STEEL HINGED LEVER COUPLING

The Model SS-28 Hinged Grooved Coupling is designed for quick connect and disconnect services. The housing segments are hinged with a lever handle for easy assembly. Use of the split pin can prevent the accidental opening of the coupling. The Model SS-28 can be used in a wide variety of applications with standard roll- or cut grooved pipe. Housings 1½"- 4" (40 mm – 100 mm) feature a smooth outer surface, housings 5"- 12" (125 mm – 300 mm) feature a cross-ribbed design for added strength. Standard gasket: Grade "E" EPDM or Grade "T" Nitrile. Available standard in CF8 (304) or CF8M (316).

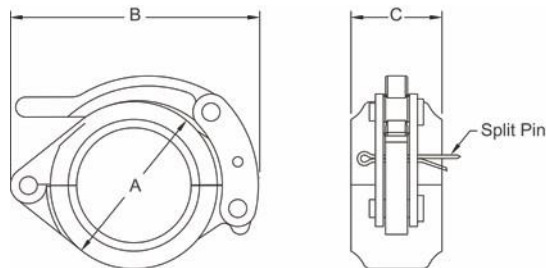

Full warranty terms
can be found on
www.shurjoint.com

Model SS-28 Stainless Steel Hinged Lever Coupling

Nominal Size	Pipe O.D.	Max. Working Pressure (CWP)*	Max. End Load (CWP)	Axial Displacement †	Dimensions			Deflection Degree†	Weight
					A	B	C		
in mm	in mm	PSI Bar	Lbs kN	in mm	in mm	in mm	in mm	(°)	Lbs Kgs
1½	1.900	300	1700	0 – 0.06	2.95	4.65	1.85	3° - 48'	2.2
40	48.3	20	7.56	0 – 1.6	75	118	47		1.0
2	2.375	300	2657	0 – 0.06	3.39	4.76	1.89	3° - 31'	2.4
50	60.3	20	11.82	0 – 1.6	86	121	48		1.1
2½	2.875	300	3893	0 – 0.06	3.62	5.91	1.89	2° - 30'	3.1
65	73.0	20	17.32	0 – 1.6	92	150	48		1.4
76.1 mm	3.000	300	4239	0 – 0.06	3.62	5.91	1.89	2° - 24'	3.1
	76.1	20	18.86	0 – 1.6	92	150	48		1.4
3	3.500	300	5770	0 – 0.06	4.69	6.42	1.89	2° - 24'	4.0
80	88.9	20	25.67	0 – 1.6	119	163	48		1.8
4	4.500	300	9538	0 – 0.13	6.50	8.07	2.05	3° - 12'	5.9
100	114.3	20	42.43	0 – 3.2	165	205	52		2.7
139.7 mm	5.500	200	9500	0 – 0.13	7.44	9.96	2.05	2° - 37'	10.8
	139.7	14	42.25	0 – 3.2	189	253	52		4.9
5	5.563	200	9717	0 – 0.13	7.44	9.96	2.05	2° - 36'	10.8
125	141.3	14	43.23	0 – 3.2	189	253	52		4.9
165.1 mm	6.500	200	13267	0 – 0.13	8.39	10.94	2.05	2° - 14'	12.8
	165.1	14	59.01	0 – 3.2	213	278	52		5.8
6	6.625	200	13782	0 – 0.13	8.50	11.06	2.05	2° - 10'	12.8
150	168.3	14	61.31	0 – 3.2	216	281	52		5.8


* The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules and cut-grooved pipe, see the below table on next page.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 – 3½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.



Expansion Pipe

Lever handles are factory assembled pretty tight for safety sake. The use of an expansion pipe will be of help for an easy opening or closing. Expansion pipes are available upon request.

Expansion Pipe size	Applicable Coupling Sizes	
½" x 6"	1½" ~4"	
¾" x 8"	5" ~ 6"	

(You can easily make your expansion pipe simply by cutting sch. 40 ½" or ¾" pipe to a proper length)



Warning:

Lever handle couplings are not recommended for services where excessive shock-loads are present, as often occur in some concrete pumping applications. When the Model SS-28 is used in concrete pumping applications, sound support and bracing practices should always be in effect. All couplings and components should be regularly inspected to ensure they are in good working condition and that the pipe grooves, coupling keys, and gasket are free of any concrete or foreign material.

Performance Data

The following tables show maximum cold working pressures (CWP) of **Shurjoint** stainless steel couplings used on stainless steel pipes.

In general it is more difficult to achieve defined groove corners on stainless steel pipe than on carbon steel pipe. Always select the correct roll set for the pipe being grooved and process grooves as defined as possible. Contact your roll-groove tool manufacturer for recommendations.

Unit: psi/bar

Model SS-28 Hinged Lever Coupling				
Nom. Size	Cut-Grooved	Roll-Grooved		
in / mm	Sch. 40S	Sch. 40S	Sch. 10S	Sch. 5S
1¼ 32	300 20	300 20	300 20	200 14
1½ 40	300 20	300 20	300 20	200 14
2 50	300 20	300 20	300 20	200 14
2½ 65	300 20	300 20	300 20	200 14
3 80	300 20	300 20	300 20	200 14
4 100	300 20	300 20	300 20	200 14
5 125	200 14	200 14	200 14	125 9
6 150	200 14	200 14	200 14	125 9

Proof test pressure: 1.5 times the listed working pressure.

Burst pressure: 3 times the listed working pressure.

MATERIAL SPECIFICATIONS

• Housing:

- Type 304 Stainless steel to ASTM A351 CF8 or A743 Gr. CF8
- ☐ Type 316 to ASTM A743 CF8M
- ☐ Type 316L to ASTM A743 CF3M
- ☐ Type 316Ti to ASTM A240
- ☐ Duplex 2205 to ASTM A890 4A.
- ☐ Super Duplex 2507 to ASTM A890 5A.
- ☐ Duplex 254SMO to ASTM A351 CK3McuN.

• Disk Encapsulation:

Grade E-pw EPDM (Color code: Double Green stripe) certified under NSF/ANSI 61 and NSF/ANSI 372 for potable water service to +180°F (+82°C). Also good for services for water with acid, water with chlorine, deionized water, seawater and waste water, dilute acids, oil-free air and many chemicals.

Not recommended for petroleum oils, minerals oils, solvents and aromatic hydrocarbons.

- ☐ **Grade “E” EPDM** (Color code: Green stripe) Good for cold & hot water up to +200°F (+93°C). Also good for services for water with acid, water with chlorine or chloramines, deionized water, seawater and waste water, dilute acids, oil-free air and many chemicals. **Not recommended for petroleum oils, minerals oils, solvents and aromatic hydrocarbons.**
Maximum Temperature Range: -30°F (-34°C) to +200°F (+93°C)*.
*EPDM seat for water services are not recommended for steam services unless valves or components are accessible for frequent replacement.
- ☐ (Option) **Grade “T” Nitrile** (Color code: Orange stripe) Recommended for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. Also good for water services under +150°F (+66°C).
Temperature range: -20°F to +180°F (-29°C to +82°C).
Do not use for HOT WATER above +150°F (+66°C) or HOT DRY AIR above +140°F (+60°C)
- ☐ Other options: Grade “O” Fluoroelastomer.
Grade “L” Silicone.
For additional details contact **Shurjoint**.

• Locking Lever Handle:

- Type 304 Stainless steel to ASTM A351 CF8 or A743 Gr. CF8
- ☐ Type 316 to ASTM A743 CF8M

• Toggle Links:

- Type 316 Stainless steel

• Hinge Pin:

- Type 316 Stainless steel

• Rivet:

- Type 316 Stainless steel

• Split Pin:

- Carbon steel wire rod to ASTM A421.

General Notes:

- **Maximum Working Pressure (CWP)** listed is the maximum cold water pressure for general piping services tested to ASTM F1476 and or AWWA C606 methods. Figures listed are based on roll- or cut-grooved standard wall carbon steel pipe. For other pipe schedules or pipe materials, contact **Shurjoint** for additional information.
- **Max. End Load** is calculated based on the maximum working pressure (CWP).
- **Field Joint Test:** For one time only the system may be tested hydrostatically at 1½ times the maximum working pressure listed (AWWA C606 5.2.3).
- **Warning:** Piping systems must always be depressurized and drained before attempting disassembly and or removal of any components.
- **The 10 Year Limited Warranty** applies to manufacturing defects only and does not cover severe service/temperature applications or wear parts.
- **Shurjoint** reserves the right to change specifications, designs and or standard without notice and without incurring any obligations

Shurjoint product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact **Shurjoint** Technical Service. **Shurjoint** reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligations to make such changes and modifications on **Shurjoint** products previously subsequently sold.